

Cooper

ATKINS

Foodservice Catalog



Bringing You the Future in Food Safety for Over 120 Years . . .

For over 120 years **Cooper-Atkins** has been a leading manufacturer of innovative food safety and environment solutions. We have global reach, and are a trusted resource for reliable, high-quality instruments and expert advice. The company continues to meet the needs of its customers, and will do so by our dedication to providing the highest level of customer service and satisfaction!



Intelli-PDA Pocket PC, MC50
with Bar Code Scanner
Page 5



TABLE OF CONTENTS	PAGE
What's New	2-3
TempTrak®	4
Intelli-PDA™	5
Thermocouple Instruments	6-8
Thermocouple Kits	8
Thermocouple Probes	9
Infrared Thermometers	10
Kitchen Timers	11
Time, Temperature, Monitoring Series	12
Digital Pocket Tests	12-13
Bi-metal Stem Test Thermometers	14
Bi-metal Thermometers	15
Refrigerator / Freezer Thermometers	16
Cooler and Dry Storage Thermometers	17
Remote Reading Panel Thermometers	17
Humidity and Temperature Meters	18
Product Index	19

What's New at Cooper-Atkins

Because we are committed to food safety, Cooper-Atkins Corporation continues to provide the most extensive line of Temperature Monitoring Equipment in the world. For additional new product information go to: www.cooper-atkins.com/newproducts.html



Models 351 & 352
Wrap&Stow and
non-Wrap&Stow
Thermocouple Instruments
Page 6 & 7



481 DualTemp2™
Infrared with
RTD Probe
Thermometer
Page 10



TTM41
Coolit-Rite™
Cooling Validator
Page 12



2237-04 Espresso
Thermometer
Page 14



TTM59 - Pocket Test Plus™
Thermometer
Page 12



212 Series - HACCP
Wall Thermometers
Page 17



1246-02 HACCP
Zoned Dial Test Thermometer
Page 14



ATKINS


TempTrak® Temperature Monitoring

Wireless temperature monitoring is one of the most exciting innovations happening in the Foodservice industry today - especially related to customer safety. Imagine, taking temperature and humidity readings of your equipment every 5 minutes 24/7 without lifting a finger. You don't have to be on-site to monitor the system or receive an alert indicating that the cooler door is open and has been for the last 15 minutes. TempTrak frees your managers to spend more time with customers and employees!

No need for external power, or network connectivity, the battery-powered **TempTrak** sensors are easily mounted in any location, and temperatures are wirelessly transmitted to the **TempTak** software which collects and records every temperature like clockwork.

The **TempTrak Monitoring System** eliminates the time and expense of manual temperature collecting. No longer will you need to visit and record temperatures of walk-in coolers, hot and cold holding units, and other temperature equipment requiring frequent monitoring. The TempTrak remote sensors can be mounted in any location and wirelessly transmit information to the software, collecting and recording every temperature and humidity reading like clock work. Each sensor monitors against preset conditions that are defined by the user and will communicate an alert by a variety of methods including pager or e-mail when a danger zone condition exists.

TempTrak software creates reports on all temperature/humidity information collected through the system. It provides records of corrective actions and monthly performance summaries for easy identification of problem equipment. Data can be stored indefinitely to provide years of history.

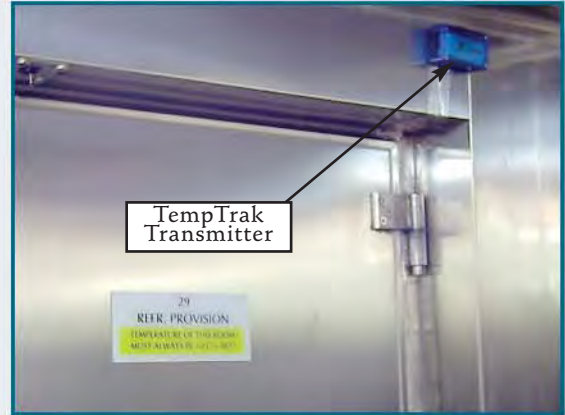

TempTrak Mini Sentry shown in waterproof enclosure.

The software interface displays various data points and reports. One section shows 'TempTrak Current Sensor Readings' for 'Deck 2 Galley' and 'Distribution Area DK3'. Another section shows 'TempTrak Temperature History' with a line graph. A third section shows 'TempTrak Equipment QA / Performance Report' for 'Wednesday, March 01, 2006 - Saturday, April 01, 2006'. A physical TempTrak sensor and its packaging are also shown.

On-board Thermistor

-20° to 150°F / -29° to 66°C

External Thermistor

-350° to 800°F / -200° to 425°C

Combination Temperature /Humidity Sensor

-20° to 150°F / -29° to 66°C, 0% to 99% RH.



Use **TempTrak Mobile** when transferring product between locations - wherever temperature validation is needed.



Intelli-PDA™

Intelli-PDA™ is a Pocket PC based application designed to take ANY form and convert it to an electronic document. Use the browser-based back office interface to create your form. Once you have created your form, the program will automatically convert it into a software application to run on the PDA. At the same time it will create several back office reports. **NO ADDITIONAL PROGRAMMING IS NEEDED.**

The software can handle over **18 Question Types**, to include multiple choice, yes or no, temperature, date, text, timer, and much more . . . **Conditional Checks**, no problem. **Checking a temperature** - is it the correct temperature? Intelli-PDA will not only know if it is correct, it will know if the temperature is **"stable"** before the probe was removed. Eliminate the possibility of temperatures **"above"** or **"below"** the specified range. Is the correct answer yes? If the question is answered no, the system will know what should be done. It will provide and record the unique corrective action for each question. Have a question about a question? You can enter **"help"** for each question. It can explain the correct method for performing that task, where to take the temperature, and how long it should take for a task. Include a picture, no problem.



Intelli-PDA shown with Serial Temperature Acquisition Device, makes easy work of checking and recording of food temperatures.

Intelli-PDA requires a user name and password. This way all collections performed are identified to a user and time/date stamped. The system will tell when and how long it took to complete a form, and can collect a person's actual signature at the end of a form. Better yet, through the use of bar code location identifiers, you can be assured that the person performing the collection was actually in the specified location. In order to get the questions on the PDA for the specific location, that person must scan the **"location bar code"**. Once the location bar code has been scanned, the questions will appear. The process is continued until the form has been completed.

Intelli-PDA is designed to work in conjunction with TempTrak® for the most **COMPLETE** data management system available today.

Call your local Cooper-Atkins representative to find out how you can start benefiting from these powerful management tools **TODAY.**

The collage displays several Intelli-PDA screens from the 'ms Osterdam' system. One screen shows an 'Inspections Response Summary Report' for the period 2/22/2006 - 3/8/2006. Another shows an 'Inspections Detail Report' for 'Aquatic Sys Log'. A third screen displays a 'Form Maintenance Inspections' interface with 'Form Selection', 'Form Type Selection', and 'Category Selection' tabs. A fourth screen shows a 'Category Questions' table for 'Aquatic System Log-AFT'. In the center, a PDA device displays a temperature of 148°F and a yellow 'WARNING HOT' alert box.



With expanding menus, increasing food and labor cost, let Cooper-Atkins show you how TempTrak and Intelli PDA can start saving you money today!

AquaTuff™ Waterproof Thermocouple Instruments with Tenth Degree (0.1°) Resolution

-100 to 999°F (-73 to 537°C) • ±0.5F° (±0.3C°) Accuracy



Switches quickly from Fahrenheit to Celsius

Turns off after ten minutes of non-use



COMPONENT

35100-K



Units use any Type "K" Thermocouple Probe.



LED Backlight

.1/1 Resolution user selectable

Hold Button freezes readings

Auto-Off feature can be disabled

Features

- IPX7 Waterproof Rated
- Auto shut-off after 10 minutes of non-use (User selectable on 352 models)
- On/Off switch
- Fahrenheit/Celsius selectable
- Factory calibration constants stored in non-volatile memory
- Large, easy-to-read LCD screen
- Rugged ABS plastic housing
- Traceability: Instrument calibrated to temperature and/or electrical standards traceable to the U.S. Department of Commerce National Institute of Standard and Technology. Under normal operating conditions, it will not need to be recalibrated.
- 2 AAA, 1.5 volt batteries included
- CE Marked, ROHS, WEEE

35200-K

Thermocouple Instruments

AquaTuff™ Wrap&Stow™ Waterproof Thermocouple Instruments with Tenth Degree (0.1°) Resolution


-100 to 500°F (-73 to 260°C) • ± 0.9°F (±0.5°C) Total System Accuracy™




Easy twist-open battery hatch, two AAA batteries included for 1800 hours of battery life.



Wrap&Stow Probes can be easily replaced at your location.

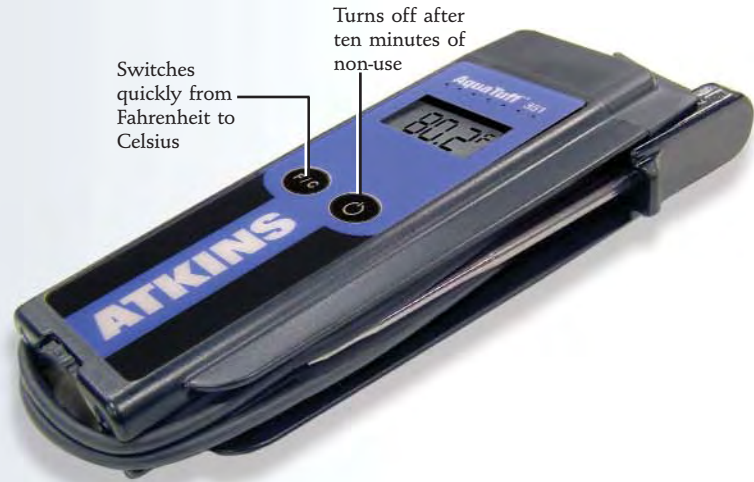

35132
with DuraNeedle Probe

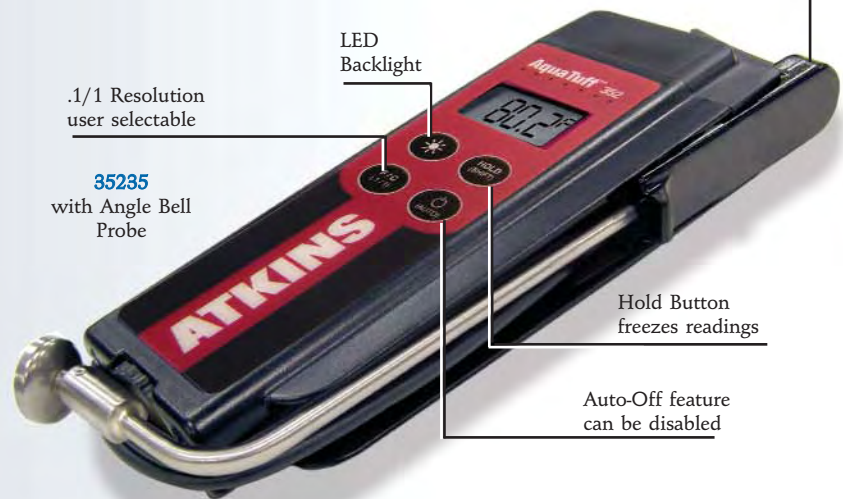

35235
with Angle Bell Probe

Heavy duty patented probe cable is reinforced with high strength Aramid fiber and metal braid - 3 probes to choose from

Model	Replaces Model
35100-K	38653-K 38658-K
35132	FW2000MK-3 34032
35135	34035
35140	34040
35200-K	39658-K
35232	33032
35235	33035
35240	33040

Non-Wrap&Stow Models	Wrap&Stow™ Models with		
	DuraNeedle Probe	Angled Bell Surface Probe*	MicroNeedle Probe
35100-K 35200-K	35132 35132-N 35232 35232-N	35135 35235	35140 35140-N 35240 35240-N

* Contact Customer Service Department for specifications

Note: Probes with -N designation are NSF

The powerful microprocessor in the **EconoTemp 32311** and **32322** delivers speed and reliability with a unique memory that stores the calibration settings, and will virtually never need recalibration.



The **93230-K EconoTemp Combo Pack** includes the **32311-K Thermocouple** with **50336 DuraNeedle** probe and lanyard.



32311-K EconoTemp (Shown with 50336)

- -40° to 500°F / -40° to 260°C
- Whole degree resolution
- 3 AAA, 1.5v batteries included
- 4500 hours battery life
- Probe not included



32322-K EconoTemp Plus

- -40° to 1000°F / -40° to 538°C
- ±1F° / ±0.5C°
- Resolution: 0.1° from -40.0° to 495.0°F / -40.0° to 257.0°C
- Whole degree resolution over remainder of range
- 3 AAA, 1.5 volt batteries included
- 1500 hours battery life



Standard Food Safety Kits include instruments recommended by foodservice professionals and can also be assembled to order.



Kit 93970-K



Kit 93232-K

Replacement Cases :


- 14245-1** Large hard case 17" x 12" x 3"
- 14235** Medium hard case 12" x 8" x 3"
- 14057** Soft (zippered) case 9" x 3.5" x 2"
- 9339** Nylon Pouch/Velcro Flap 8.5" x 3.5" x 1"

Kit No.	Kit Includes
93086-K	35100-K, 50209 Needle, 50306 Oven, 50012 Surface Angled Bell Probes, & Medium Hard Case 14235
93970-K	35200-K, 50338 Oven, 50012 Surface Angled Bell, 50335 DuraNeedle (4.5") Probes, & Medium Hard Case 14235
93013-K	32311-K, 50335 Needle, 50306 Oven, 50012 Surface Angled Bell Probes, & Soft Zippered Case 14057
93232-K	32311-K, 50336 DuraNeedle, 50306 Oven Probes, & Medium Hard Case 14235
93233-K	32311-K, 50336 DuraNeedle, 50306 Oven, 50012 Surface Angled Bell Probes, & Medium Hard Case 14235
93237-K	32311-K, 31901 Economy Needle, 31905 Economy Air, 31907-K Economy Bell Surface Probes, & Medium Hard Case 14235

Thermocouple Probes


The Cooper-Atkins probe line is the most extensive you will find in the foodservice industry. We build custom probes. With over 1500 probes available, rely on us to manufacture a probe for your specific need or requirement.

Patty Probe with Depth Stop Design

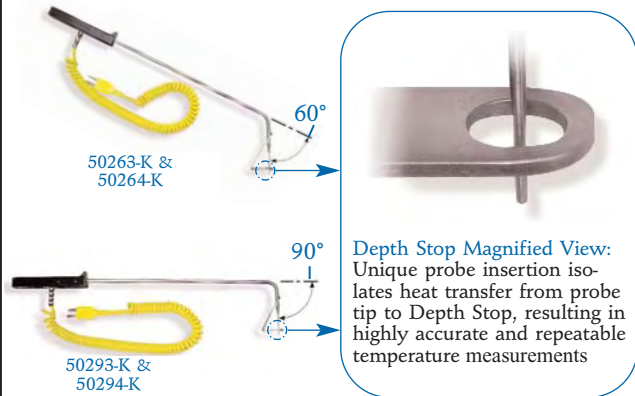

Patent pending **Depth Stop** Design eliminates operator guesswork in determining proper tip insertion depth. MicroNeedle tip has 1 second response time for fast paced kitchens.

- 50263-K** 60° angle with 3/16" depth
- 50264-K** 60° angle with 1/4" depth
- 50293-K** 90° angle with 3/16" depth
- 50294-K** 90° angle with 1/4" depth

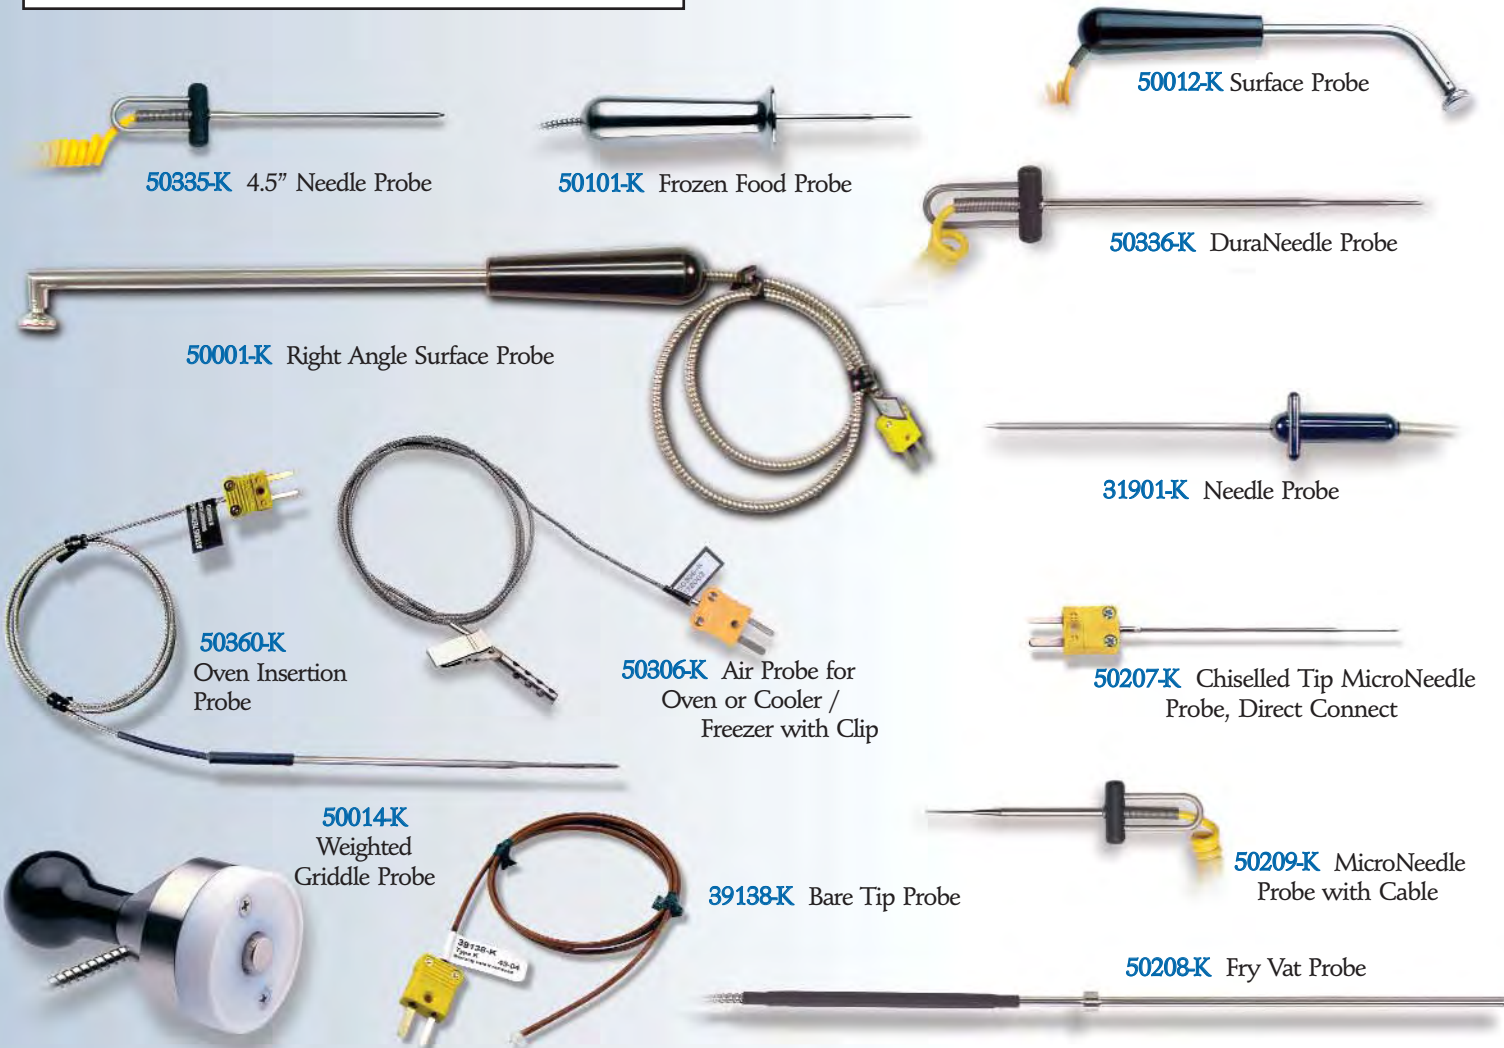

Non-Contact Infrared Thermometers measure surface temperatures fast, and avoid cross-contamination during temperature checks.

481 DualTemp2™ Infrared with Platinum RTD Probe

Infrared Features

- -40° to 536°F / -40° to 280°C
- Distance to Spot: 3:1
- Illuminating beam

Platinum RTD Probe Features


- -40° to 392°F / -40° to 200°C
- Response time <10 seconds

Timer Features

- 9 : 59' : 59"
- Alarm sounds for 30 seconds when timer reaches "0"

Unit Features

- Resolution: 0.1°
- Auto Power-Off: 20 seconds
- 100 hours battery life with low battery indicator
- 9 volt battery included
- Data hold and maximum temperature memory
- HACCP LED indicators
- Storage pouch included

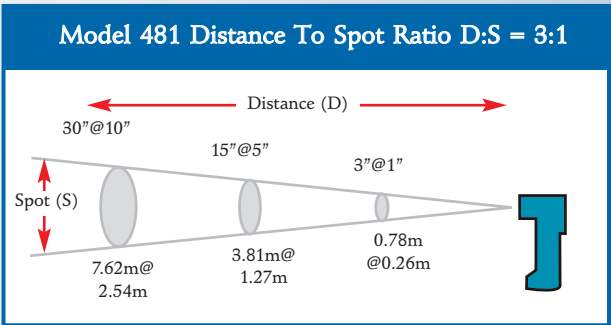

D:S (Distance to Spot Ratio): The further away from the object, the larger the surface area measured. Optical resolution is expressed as a ratio of the distance to the resolution spot divided by the diameter of the spot.



412 Gun Style Infrared with Probe Jack

- -76° to 932°F / -60° to 500°C
- Distance to Spot: 11:1
- Single point laser sighting
- Default emissivity .95 adjustable
- Auto Off, high / low alarms
- Back lit LCD
- Data hold, Avg, Max, Min diff and lock modes
- Low battery indicator
- 140 hours continuous - 180 typical hours battery life
- 2 AAA batteries included




461 Slim-Line Infrared Thermometer

- 25° to 400°F / -13° to 204°C
- Distance to Spot: 4:1
- Laser sighting
- 9 volt battery included

470 Mini Infrared Thermometer is pocket-sized and you can use the lanyard to wear it around your neck.

- -27° to 428°F / -33° to 220°C
- Distance to Spot: 1:1
- Memory for max / min values
- Lithium button cell
- CR2032 battery included

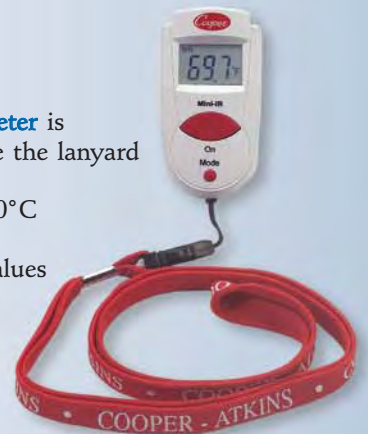



TFS4 - Multi-Station Digital Timer has four, 99 hour 59 minute, timer stations that can be used simultaneously. Its large LCD (3" x 3") and bright color coded flashing lights allow for easy viewing. The **TFS4** has four distinctive audio alarms with an adjustable volume control that makes it easy to hear from across a large room.

Non-skid rubber feet or wall mounting keep the timer secured, and its corresponding colored button keypad is splash-proof. A one-touch START / STOP button is located on top of unit for quick and easy operation.

- Switchable, Minutes : Seconds or Hours : Minutes
- Recall mode
- 4 "C" batteries included



TS100 Stopwatch Timer

- 99 Minutes / 59 Seconds
- 18" / 45.7cm soft nylon cord to wear around neck
- Counts up or down
- Recall mode
- G13A micro cell battery included



Wire Hanger is Perfect for Coffee Urns and Airpots



TC6 - 24 Hour Timer / Clock / Stopwatch

Includes a wire hanger, easel stand, clip-on, or magnet mount.

- Counts up or down
- Recall mode
- AAA battery included



TW3 Waterproof Timer can be submerged 39" / 1 meter for an hour.

- 99 Minutes / 59 Seconds
- Large LCD
- Switchable, Hours : Minutes or Minutes : Seconds
- Counts up or down
- Back stand and magnet mount
- AAA battery included



TM60 Long-Ring 60 Minute Mechanical Timer

- Sturdy molded case
- Non-skid rubber feet
- One-handed operation



TTM41 Coolit-Rite™ Cooling Validator

The Food Code requires food must be cooled to 40°F or lower in less than four hours after cooking or hot holding. The **TTM41 Coolit-Rite** will assist an operator in verification of compliance with these HACCP Guidelines. TTM41's built-in programmable timer tracks elapsed time while its thermometer monitors the temperature of your food. TTM41 begins counting up when the current temperature of the food drops below 41°F or time expires and displays the final temperature until cleared.



- -4° to 302°F / -20° to 150°C
- Resolution: 0.1°
- Min/Max temperature hold
- 15" Stainless Steel Stem with minimal depth indicator
- Waterproof
- Adjustable Vessel Clip
- Timer Range: 6 (Hours) : 59 (Minutes)
- #LR44 battery included (plus a spare)

The **DTT361 Cooking Thermometer / Timer** with alarm monitors internal temperature of food while cooking in your oven.

- 32° to 392°F / 0° to 200°C
- Stainless steel probe inserts into the food while the oven door closes tightly over its specially-designed cord
- AAA battery included
- Replacement Probe **9335** is available



TTM59 Pocket Test Plus

New and innovative, the waterproof **Pocket Test Plus** with 3 station timer, clock and date features, replaces the typical wristwatch in the kitchen with an all-in-one pocket test thermometer. It has a **response time of less than 6 seconds** and an **accuracy of ±1°F** for the entire range, and is dishwasher safe.

- -4° to 350°F / -20° to 176°C
- LCD has digital clock and date (month & day) read out and the ability to choose standard or military time formats
- 3 separate timers and distinctive alarms
- #CR2032, 3 volt lithium battery included
- Lifetime Warranty

Reduced tip design



Cooper-Atkins offers a wide range of fast response **Digital Pocket Tests**, with 0.1° resolution. Thermistor sensors are located in the probe tip for quick response time and accurate readings.

DFP450W
Dishwasher Safe
Digital Pocket Test

- -40° to 450°F / -40° to 232°C
- 5" / 12.7cm Stem
- #392 battery included (plus a spare)
- Automatic Shut-off
- Waterproof
- Field calibratable
- Maximum temperature memory
- Lifetime warranty



Because they are waterproof, and have a maximum temperature memory feature, you can use the DFP450W or TTM59 to test the **hottest** rinse temperature in your dishwasher.



DPP400W
Waterproof Pen Style
Digital Pocket Test

- -40° to 392°F / -40° to 200°C
- 2.75" / 7 cm stem
- #LR44 battery included
- Automatic Shut-off




DT300
Oval Style
Digital Pocket Test

- -40° to 302°F / -40° to 150°C
- 5" / 12.7cm Stem length
- #A76 battery included
- On-off switch



9150 Probe Wipes clean and sanitize probes between temperature checks to avoid cross contamination. Ten boxes of 200 in a carton. Each wipe contains 70% Isopropyl Alcohol.

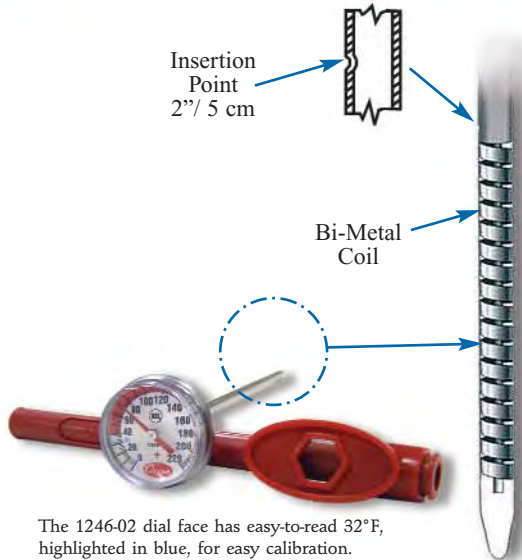

The 1246-02 dial face has easy-to-read 32°F, highlighted in blue, for easy calibration.

- 1246-01-1 -40° to 180°F 1/pkg
- 1246-01C-1 -40° to 80°C 1/pkg
- 1246-02-1 0° to 220°F 1/pkg
- 1246-02-2 0° to 220°F 2/pkg
- 1246-02C-1 -20° to 100°C 1/pkg
- 1246-02C-2 -20° to 100°C 2/pkg
- 1246-03-1 50° to 550°F 1/pkg
- 1246-03C-1 10° to 285°C 1/pkg



1246PS-02 Write-Temp™ Ball-Point Pen & Bi-metal Thermometer in One

Innovative 2-in-1 design incorporates a retractable ball-point pen, housed in the sheath with recalibration wrench; and sold with a 1246-02 bimetal pocket test.

- 1246PS-02 0° to 220°F
- 1246PS-02C -20° to 100°C



Bi-metal thermometers should be checked for calibration if dropped, exposed to temperatures greater or less than the span of the dial, or other excessive uses. For accurate readings the Cooper-Atkins bi-metal pocket test has an external dimple on the stem to indicate exactly where the coil ends and its appropriate insertion point. We do not recommend use of bi-metal thermometers for thin foods such as hamburgers. The 1" / 2.5 cm dial, 5" / 12.7 cm stem, bi-metal pocket tests have a magnifying lens for easy reading and a combination pocket sheath with calibration tool. The new 1246-02 dial has a freezing temperature mark indicated in blue for ease of calibration, and a HACCP danger zone highlighted in red.



Super Value Twin2Pack



Super Value Combo4Pack

Comes with two 1246 Pocket Test thermometers and two 25HP refrigerator/freezer thermometers.

- CP101 °F 4/pkg
- CP101-C °C 4/pkg



2237-04 Espresso Thermometer

The key to steaming milk is to build volume before it gets too hot. A 1-3/4" / 4.5 cm dial with proper froth zone on a 7" / 17.8 cm stem that allows for accurate measurement when using the adjustable stainless steel vessel clip. 0° to 220°F/°C



1236-70 Pocket Test Thermometer has a temperature range of 0° to 220°F with a 1" / 2.5 cm dial and 5" / 12.7 cm stem. Packaged with a stainless steel vessel clip for use with frothing pitchers.



Super Value Twin2Pack

24HP & 26HP are 2" / 5 cm diameter stainless steel construction



- Oven Thermometers**
- 24HP-01-1** 100° to 600°F / 50° to 300°C 1/pkg
 - 24HP-01-2** 100° to 600°F / 50° to 300°C 2/pkg
 - 24HP-01C-2** 50° to 300°C (°C only) 2/pkg



Hot Holding Cabinet Thermometers

- 26HP-01-1** 100° to 175°F / 40° to 80°C 1/pkg
- 26HP-01-2** 100° to 175°F / 40° to 80°C 2/pkg
- 26HP-01C-2** 40° to 80°C (°C only) 2/pkg



3210-08 Grill Thermometer

- 100° to 600°F / 50° to 300°C
- 2.5" / 6.3 cm cast aluminum construction
- Unique grips for easy removal from hot grill surface



322 Candy/Jelly/Deep-Fry

- 200° to 400°F / 90° to 200°C
- Pre-set pointer
- Adjustable vessel clip on 6" / 15.2 cm stem



323 Meat Thermometer

- 130° to 190°F / 54° to 88°C
- 6" / 15.2 cm stem
- preset pointers




2225-05 Pizza Oven Retro-Fit Thermometer

- 200° to 1000°F
- 4" / 10.1 cm long, 0.25" / 0.63 cm diameter stem
- 3.5" / 8.8 cm flange diameter

3270-05 Deep-Fry

- 50° to 550°F / 10° to 285°C
- Adjustable vessel clip
- 2.5" / 6.3 cm dial
- 15" / 38.1 cm stem
- Perfect for using kettle method for deep-fried turkey



329 Paddle Style Candy / Jelly / Deep-Fry Thermometer

- 100° to 400°F / 40° to 200°C
- Adjustable vessel clip
- 12.5" / 31.7 cm
- Easy grip black plastic handle
- Non-toxic spirit filled glass tube



The **2238** series has a 2" / 5 cm dial with 8" / 20.3 cm stem, tempered glass lens and stainless steel vessel clip.

- 2238-06** 0° to 220°F / -10° to 100°C
- 2238-14** 50° to 550°F / 10° to 280°C




Super Value
Twin2Pack

2" / 5 cm diameter stainless steel construction

25HP Refrigerator / Freezer Thermometers

25HP-01-1	-20° to 80°F / -29° to 27°C	1/pkg
25HP-01-2	-20° to 80°F / -29° to 27°C	2/pkg
25HP-01C-2	-29° to 27°C (°C only)	2/pkg

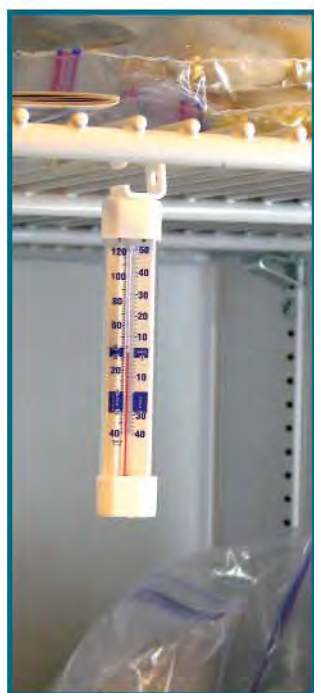

330 Refrigerator / Freezer Thermometer

- -40° to 120°F / -40° to 50°C
- 3" / 7.6 cm, Non-toxic spirit filled glass tube

330-0-1	Card
330-0-4	Bulk in 50



Refrigerator air temperature should be 35°F (1.7°C) or lower.




Super Value
Twin2Pack

335 Refrigerator / Freezer Thermometer

- -40° to 80°F / -40 to 25°C
- 5" / 12.7 cm, glass tube
- Magnifying lens
- Hang, stand or permanently mount
- Stainless Steel casing

335-01-1	-40° to 80°F / -40 to 25°C	1/pkg
335-01-2	-40° to 80°F / -40 to 25°C	2/pkg

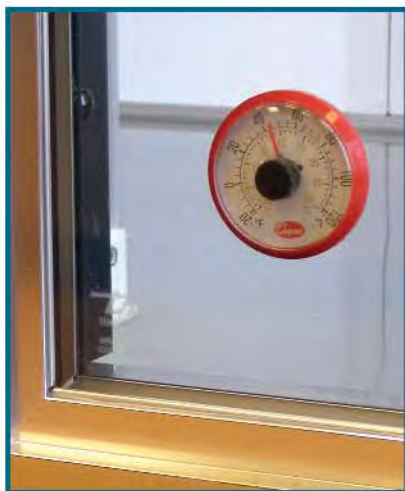

535 Cooler Thermometer

Magnetic back or self adhesive tabs are provided for mounting to inside of refrigerated glass cases to view through the glass front from the outside.

- -20° to 120°F / -30° to 50°C
- 1.5" / 3.8 cm diameter



268-02 Indoor/Outdoor Thermometer

Reversible suction cups allow for easy mounting on either walls or windows.

- -40° to 120°F / -50° to 50°C
- 7.5" / 19 cm high
- Non-toxic spirit filled glass tube



212 - Wall Thermometers, brightly colored, 12" / 30.5 cm diameter, are available for a variety of requirements that increases employee awareness while monitoring temperature.

212-150 Thermometer

-40° to 120°F / -40° to 50°C
0° to 100% RH

212-154 Dry Storage

10° to 80°F
0° to 100% RH

212-155 Prep Area

10° to 80°F
0° to 100% RH

212-156 Cooler

10° to 80°F
0° to 100% RH

212-157 Freezer

-10° to 80°F
0° to 100% RH



Remote Reading Panel Thermometers

Get accurate interior temperature readings without opening any doors.



SP160

Digital Solar Panel Thermometer

- -58° to 158°F / -50° to 70°C
- 0.5" / 1.2 cm LCD
- 4' / 122 cm lead
- Solar with 1.5 AAA volt battery back-up



Cooper-Atkins retrofit panel thermometers are offered in a variety of configurations and temperature ranges.

Vapor Tension Thermometers

- 2" Dial
- 48" Capillary
- Front flange, back connect for flush mounting

6142-20 -40° to 60°F / -40° to 15°C



Relative Humidity (RH) plays an important role in food storage and shelf life of perishables.



- TRH122M - Mini Thermo-Hygrometer** features a min/max memory, daily updates, °F / °C switchable and can be wall mounted.
- 14° to 122°F / -10° to 50°C
 - 10 to 99% RH
 - AAA 1.5 volt battery included



- PMRH120**
- -12° to 140°F / -24° to 60°C
 - 10 to 99% RH
 - 0.625" / 1.6 cm LCD
 - 39" / 1 meter lead length
 - AA battery



- TRH158 Temperature and Humidity Meter**
- 32° to 122°F / 0° to 50°C
 - 25 to 90% RH
 - No remote sensor
 - Min / Max feature
 - 2.125" x 2.875" / 5.4 cm x 7.3 cm LCD display
 - Table or Wall Mount
 - AAA 1.5 volt battery included



T158 Indoor / Outdoor Temperature Meter

- 32° to 122°F / 0° to 50°C (indoor)
- Remote Sensor -58° to 158°F / -50° to 70°C
- 10' / 3 meter lead length
- Table or Wall Mount
- Min / Max feature
- 2.125" x 2.875" / 5.4 cm x 7.3 cm LCD display
- AAA 1.5 volt battery included



TRH158-1 Indoor / Outdoor Temperature and Humidity Meter

- 32° to 122°F / 0° to 50°C (indoor)
- Remote Sensor 32° to 140°F / 0° to 60°C
- 25 to 90% RH, indoor and remote
- 10' / 3 meter lead length
- Table or Wall Mount with remote sensor
- Min / Max feature
- 2.125" x 2.875" / 5.4 cm x 7.3 cm LCD display
- AAA 1.5 volt battery included

Products

To find product information use the page numbers below or go to www.cooper-atkins.com and type in the product category or product item number in the Search Box. You'll be linked directly to the webpage where you'll find additional product information and specifications.



Model No.	Page / Website	Model No.	Page / Website	Model No.	Page / Website	Model No.	Page / Website
1013	.Website	35200-K	.6-7	55032	.Website	HT3100	.Website
1014	.Website	35232	.6-7	55032-N	.Website	Intelli-PDA	.5
1030	.Website	35232-N	.6-7	55035	.Website	IO70	.Website
1035	.Website	35235	.6-7	55040	.Website	MFM300	.Website
1050	.Website	35240	.6-7	55040-N	.Website	MFM300 Kit1	.Website
1051-03	.Website	35240-N	.6-7	6000	.Website	MFM300 Kit2	.Website
1051-04	.Website	3010	.Website	6020	.Website	MFM300 Kit3	.Website
1052	.Website	3110MK	.Website	6030MK	.Website	MFM300 Kit4	.Website
1075	.Website	3210-08	.15	6142-06	.Website	PM120-0-8	.Website
1078	.Website	3270-05	.15	6142-13	.Website	PMRH120	.18
1236-17-1	.Website	31901-K	.9	6142-20	.17	QC450	.Website
1236-70-1	.14	31903-K	.Website	6142-58	.Website	SH44AC-E	.Website
1246-01-1	.14	31905-K	.Website	61840-F	.Website	SH44A-E	.Website
1246-01C-1	.14	31907-K	.Website	6642-06	.Website	SH44A-Only-E	.Website
1246-02-1	.14	32311-K	.8	6642-12	.Website	SH66AC-E	.Website
1246-02-2	.14	32322-K	.8	6742-19	.Website	SH66A-E	.Website
1246-02C-1	.14	36036-F	.Website	6812-01	.Website	SH66A-Only-E	.Website
1246-02C-2	.14	38653-K	.Website	6812-02	.Website	SP120	.Website
1246-03-1	.14	38658-K	.Website	7010	.Website	SP160	.17
1246-03C-1	.14	39035-K	.Website	7040	.Website	SRH77AC-E	.Website
1246PS-02-8	.14	39138-K	.9	7112-01	.Website	SRH77A-E	.Website
1246PS-02C-8	.14	39658-K	.Website	7112-02	.Website	T158	.18
1410MK-FW	.Website	401	.Website	7112-05	.Website	TC100A-E	.Website
14057	.Website	412	.10	7612-06	.Website	TC100A-Only-E	.Website
14235	.Website	460	.Website	8410MK	.Website	TC6-0-8	.11
14245-1	.Website	461	.10	9010	.Website	TD2000	.Website
14340	.Website	470	.10	9015	.Website	TD2000-01	.Website
14908	.Website	480	.Website	9150	.13	TempTrak	.4
24HP-01-1	.15	481	.10	9302	.Website	TFS4	.11
24HP-01-2	.15	4005	.Website	9315	.Website	TM60	.11
24HP-01C-2	.15	40051	.Website	9327	.Website	TM99AC-E	.Website
25HP-01-1	.16	4005MK	.Website	9335	.Website	TM99A-E	.Website
25HP-01-2	.16	4011	.Website	9337FW	.Website	TM99A-Only-E	.Website
25HP-01C-2	.16	4040	.Website	9339	.Website	TM99A-UL-E	.Website
26HP-01-1	.15	49126-K	.Website	9342	.Website	TM99A-V-E	.Website
26HP-01-2	.15	49136-K	.Website	9343	.Website	TRH122M	.18
26HP-01C-2	.15	49138-K	.Website	9345	.Website	TRH158-0-8	.18
212-150	.17	49140-K	.Website	9347	.Website	TRH158-1-8	.18
212-154	.17	535	.16	9348	.Website	TS100	.11
212-155	.17	5005	.Website	9349	.Website	TTM41	.12
212-156	.17	5028	.Website	9350	.Website	TTM59	.12
212-157	.17	5029	.Website	9351	.Website	TW3	.11
250-0-1	.Website	5200	.Website	9352	.Website		
255-06	.Website	5250	.Website	9355	.Website		
255-12	.Website	5400	.Website	9360	.Website		
255-13	.Website	50001-K	.9	9362	.Website		
268-02	.17	50008-K	.Website	9365	.Website		
2007	.Website	50010-K	.Website	9366	.Website		
2010	.Website	50012-K	.9	93013-K	.Website		
2015	.Website	50014-K	.9	93086-K	.Website		
2020	.Website	50069-K	.Website	93230-K	.8		
2020K	.Website	50101-K	.9	93232-K	.8		
2200-07	.Website	50143-K	.9	93233-K	.Website		
2225-02	.Website	50200-K	.Website	93237-K	.Website		
2225-03	.Website	50207-K	.9	93960-K	.Website		
2225-05	.15	50208-K	.9	93970-K	.8		
2234	.Website	50209-K	.9	CP101-0-8	.14		
2236-02	.Website	50210-K	.Website	CP101-C-8	.14		
2237-04	.14	50263-K	.9	CT180-50-6	.Website		
2238-06	.15	50264-K	.9	CT220-50-6	.Website		
2238-14	.15	50293-K	.9	DFP450W	.13		
2240-05	.Website	50294-K	.9	DM120	.Website		
2240-05C	.Website	50306-K	.9	DM120C	.Website		
2245-02	.Website	50318-K	.Website	DM120CS	.Website		
2245-03	.Website	50319-K	.Website	DM120S	.Website		
2255-02	.Website	50332-K	.Website	DM450	.Website		
2255-03	.Website	50335-K	.9	DM450S	.Website		
322	.15	50336-K	.9	DPP400W	.13		
323	.15	50337-K	.Website	DPS300	.12		
329	.15	50338-K	.Website	DPS300C	.12		
330-0-1	.16	50360-K	.9	DRH122	.Website		
330-0-4	.16	50361-K	.Website	DT300	.13		
332	.Website	50415-K	.Website	DTT361	.12		
335-01-1	.16	53032	.Website	FT24	.Website		
335-01-2	.16	53035	.Website	FW2000	.Website		
35100-K	.6-7	53040	.Website	FW2000MK	.Website		
35132	.6-7	53041	.Website	FW2000MK-Only	.Website		
35132-N	.6-7	54032	.Website	GL100	.Website		
35135	.6-7	54035	.Website	GL100-02	.Website		
35140	.6-7	54040	.Website	GL100-05	.Website		
35140-N	.6-7	54041	.Website	GL300	.Website		

LIMITED WARRANTY

Cooper-Atkins Corporation warrant to the original purchaser, products for a period of one year from the date of purchase. The warranty covers manufacturing defects in material or workmanship. This limited warranty excludes all batteries. This warranty does not include failure due to using the product in a manner not consistent with the instructions. Exceptions to our one year warranty are the following products:

- DFP450W** Lifetime Warranty
- TTM59** Lifetime Warranty
- FT24-03** 2 Year Warranty
- MFM300** 2 year Warranty with extended warranty available


Thermocouple Instruments
Industry Leading **5 Year Warranty** (excluding TD2000)

Cooper ATKINS



Industrial Division: Foodservice is not our only specialty. We also provide a wide array of HVAC/R and industrial products.

Healthcare Division: Cooper-Atkins TempTrak monitoring system offers 24/7 remote temperature, humidity and door contact monitoring for refrigeration/storage of medicines, vaccines, blood, food, hot holding of blankets and much more. It wirelessly transmits real-time data to an on-site or remote computer, and provides instantaneous alerts and paperless reports for trend analysis, corrective actions and historical data files.

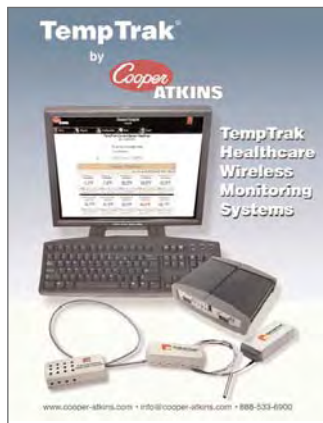

To request a copy of the Cooper-Atkins Industrial or Healthcare Catalog, visit our website or call our headquarters.

Customization: Cooper-Atkins Corporation is known for offering exceptional service and innovative quality products. We provide solutions tailored to the needs of your business. We private label many of our thermometers and packaging, as well as customize for OEM requirements. For more information about this special service, please contact your distributor, representative or our headquarters.

