



Fabricated Fume Hood

*Cost Effective Alternative to Metal Hoods
When Sparking Is a Concern*

The translucent polypropylene hood is non-conductive, chemical resistant and corrosion proof yet allows light to shine through into the work area. For added convenience and accessibility, the door is made of clear acrylic providing unimpeded visibility. It may be set open at three positions from 25cm (10") to 53cm (21"). Durable construction includes 6.4mm (1/4") thick polypropylene with heavier sections where needed. Outside dimensions are 122cm (48") wide, 61cm (24") deep, and 91cm (36") high. A full length 3.2mm (1/8") thick interior baffle directs airflow across the table surface as well as vertically. The stack has a 152mm (6") outside diameter, with a damper. An exhaust system capable of drawing 500 cfm (free air) is recommended. Shipped in a crate. Weight 45.4 kg. (100 lbs).



CATALOG NO.
H5000-0000

PRICE/EACH
\$1,545.00



Tapered Rear Exhaust Fume Hoods


Ideal Vent for Tanks and Vats

These corrosion proof polypropylene exhaust hoods are designed to rest on the rear edge of tanks and draw a stream of air across the top of the tank away from the operator.



CATALOG NO.	WIDTH x HEIGHT	SLOT HEIGHT x DEPTH	STACK O.D.	MATERIAL THICKNESS	PRICE EACH
H50015-0000	61 x 31cm (24 x 12")	76 x 76mm (3 x 3")	15mm (6")	4.8mm (3/16")	\$366.00
H50016-0000	91 x 46cm (36 x 18")	76 x 76mm (3 x 3")	20mm (8")	4.8mm (3/16")	469.80
H50017-0000	122 x 61cm (48 x 24")	76 x 102mm (3 x 4")	20mm (8")	6.4mm (1/4")	600.00

Custom Fabricated Fume Hoods
Built to Your Specifications

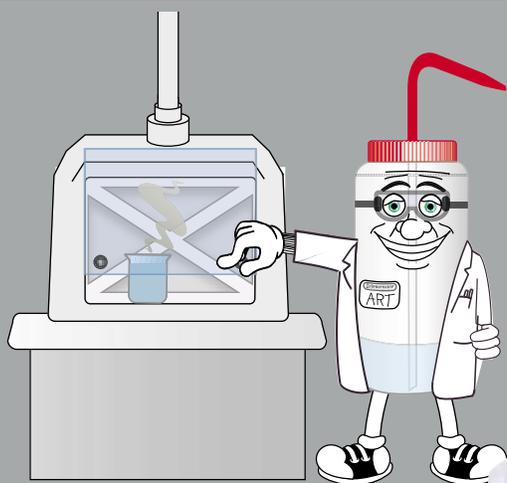

Note: Fabricated fume hoods can be custom-built to your own specifications in size, design or material. Features such as built-in sinks, multiple stacks, piping and spray apparatus can be included. Please submit a sketch showing your requirements. Call 1-800-4BEL-ART or visit our website at www.belart.com.